


00301-RGBW

Material	Housing: Made of SUS316
Housing Colour	polished S.S
LED Colour	Red/Green/Blue/White
LED	18PCS RGBW LED
LED Beam Angle	120°
Features	Surface mount under water light
Working Voltage	DC12V
Wattage	1.2W/Cycle
Effective Lumen	White:95Lumen Green:67Lumen Blue:10.2Lumen Red:12Lumen
Waterproof standard	IP: 68
life TEST FOR LED LAMP(1000 hours)	Lumen Maintenance Percentage>95%
Operation Temperature	-20° ~ +45°C
Certificate	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px;">UL</div> <div style="border: 1px solid black; padding: 2px;">CE</div> <div style="border: 1px solid black; padding: 2px;">RoHS</div> <div style="border: 1px solid black; padding: 2px;">TUV</div> </div> <div style="text-align: center; margin-top: 5px;"> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; margin-right: 5px;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black;"></span> </div>

The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shell be destroyed

INSTALLATION DIAGRAM

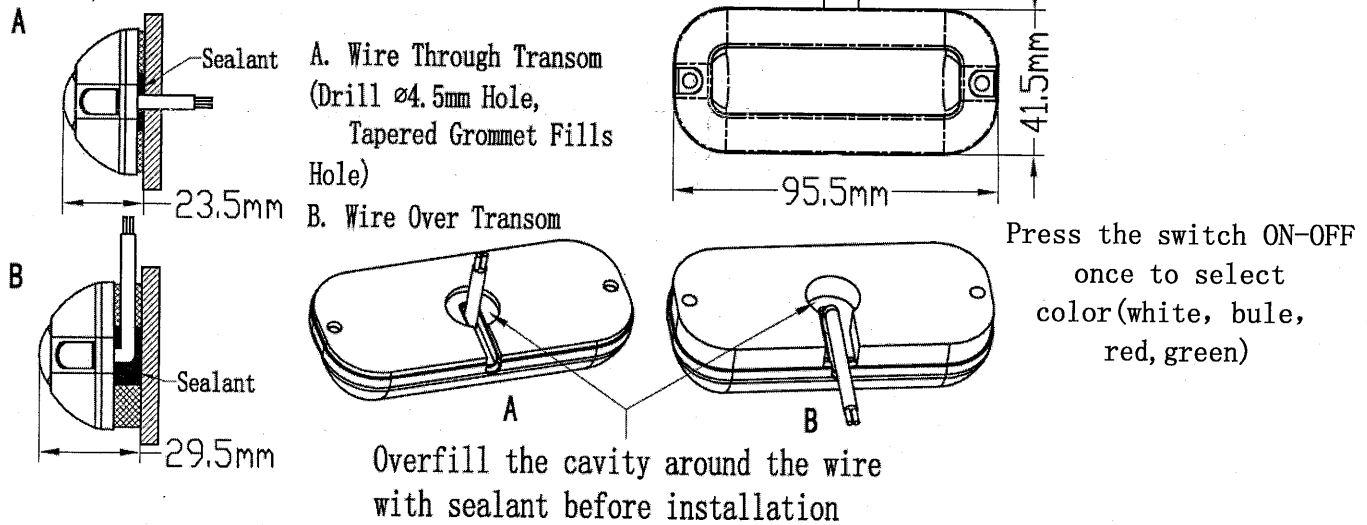

GONIOPHOTOMETER TEST REPORT (White)

