Continuous Rating	100 Amps 12~50 VDC
Intermittent Rating	300 Amps
Continuous Rating for UL-1107 requirement	100 Amps
Cranking Rating	1000 Amps
Insulation Resistance	DC 1000V 100M ohm Min.
Dielectric Strength	DC 2000V 1 minute
	AC 1000V 1 minute
Operation Temperature	-20°C~80°C
Switch Function	OFF／1／2／1&2
Actuation Force	5±0.5 Kgf-cm

Mounting Hole



Circuit Diagram



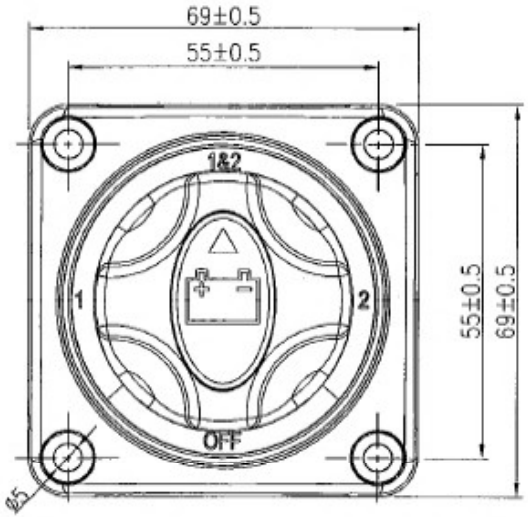

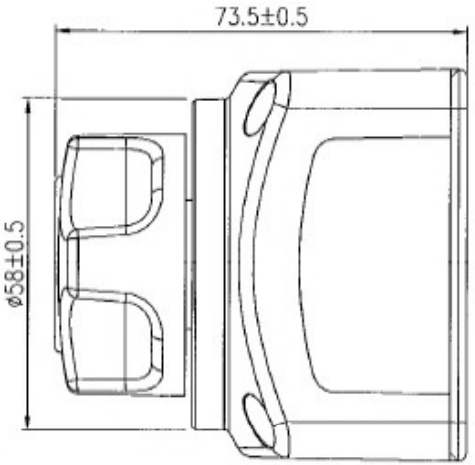

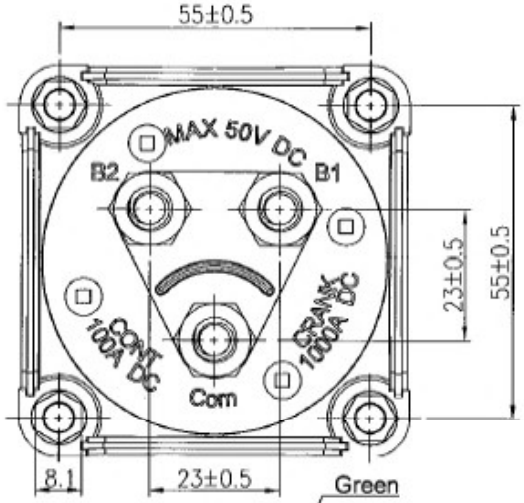

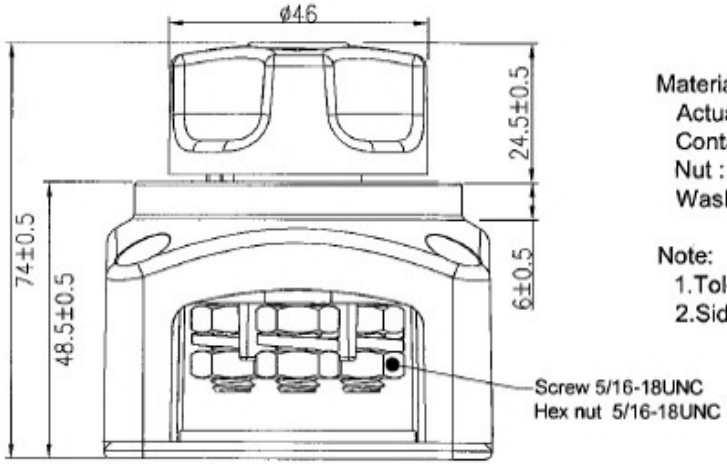

Material :
Actuator,Housing,Cover : PBT(UL flame:94V-0)
Contact, Screw : copper alloy
Nut : nickel plated brass
Washer : SUS316

Note:
1.Tolerance is ±0.5mm(0.02") unless other notice
2.Side plates : 3PCS

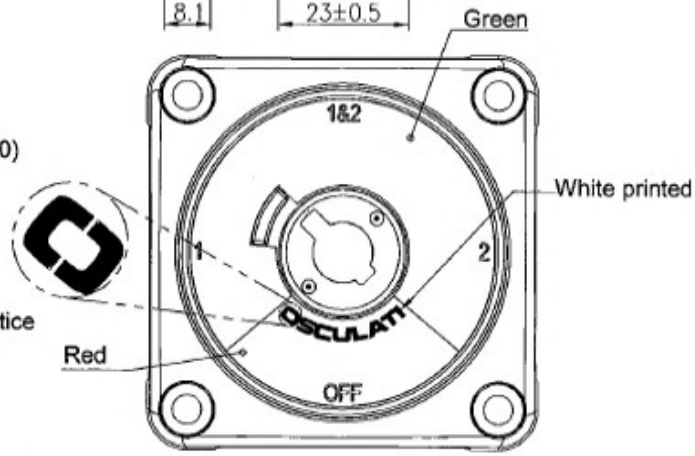

For EO021 only
Osculati pack： white box + colored label

Color layout

			△	Drawn	Checked	Approved		Model Name	Battery Switch
			△				Customer No. 14.923.12	Model No.	REV.
Date	Name	Description	NO	8/20/'19			Unit mm		0